



pa η da 3.0 Pro 1

590W

MAXIMUM MODULE EFFICIENCY

22.8%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

**IMPROVED POWER
NEVER SETTLE FOR LESS**



Backside Yield



Wide Applications



Superior Yield



Outstanding Bifaciality



Excellent Durability



Yingli Solar Website



QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE

ISO 9001: Quality management systems


ISO 14001: Environmental management systems

IEC 62941: Quality system for PV module manufacturing

ISO 45001: Occupational health and safety management systems





Munich RE

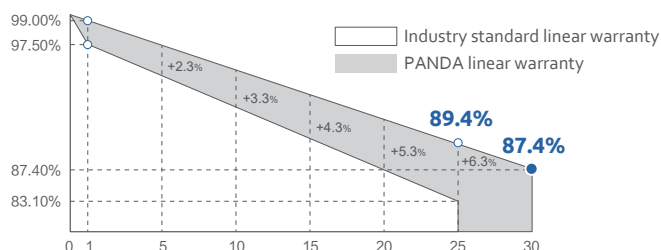


1.00% the 1st year power degradation
0.40% annual power degradation

BACK VIEW
(units:mm)

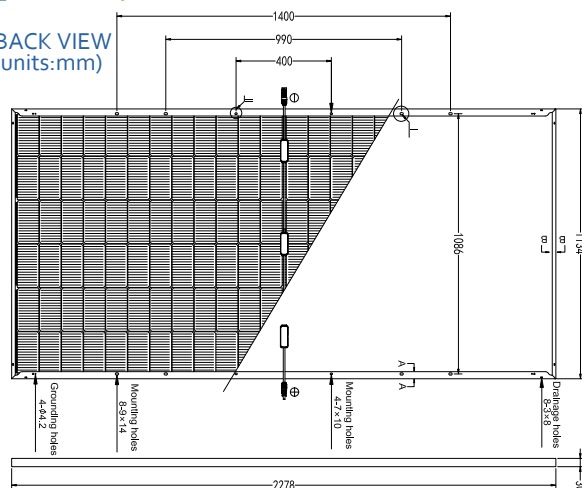

I-V / P-V CURVES

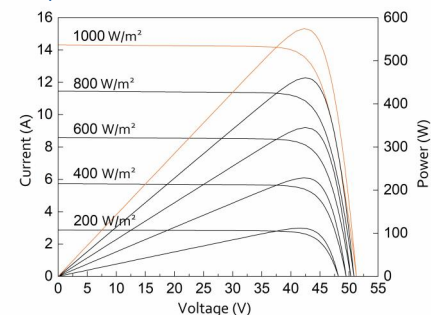

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Electrical Parameters at Standard Test Conditions (STC*)

Module type	YLxxxCF72 e/2 (xxx=Pmax)					
Power output-Pmax (W)	565	570	575	580	585	590
Power output tolerances-ΔPmax (W)	0 / + 5					
Module efficiency-η _m (%)	21.9	22.1	22.3	22.5	22.6	22.8
Voltage at Pmax - V _{mpp} (V)	42.13	42.29	42.47	42.65	42.83	43.01
Current at Pmax-I _{mpp} (A)	13.42	13.48	13.54	13.60	13.66	13.72
Open-circuit voltage-V _{oc} (V)	50.86	51.06	51.26	51.46	51.66	51.86
Short-circuit current-I _{sc} (A)	14.20	14.26	14.32	14.38	14.44	14.50

*STC: 1000 W·m⁻² irradiance, 25°C cell temperature, AM 1.5.

Electrical Parameters at Nominal Operating Cell Temperature (NOCT*)

Power output-Pmax (W)	430	434	437	441	445	449
Voltage at Pmax - V _{mpp} (V)	40.19	40.34	40.51	40.69	40.86	41.03
Current at Pmax-I _{mpp} (A)	10.70	10.75	10.80	10.84	10.89	10.94
Open-circuit voltage-V _{oc} (V)	48.30	48.49	48.68	48.87	49.06	49.25
Short-circuit current-I _{sc} (A)	11.44	11.49	11.54	11.59	11.63	11.68

*NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m · s⁻¹ wind speed.

Bifacial Electrical Parameters at Standard Test Conditions(BNPI*)

Power output-Pmax (W)	626	632	637	643	648	654
Voltage at Pmax - V _{mpp} (V)	42.13	42.29	42.47	42.65	42.83	43.01
Current at Pmax-I _{mpp} (A)	14.87	14.94	15.00	15.07	15.14	15.20
Open-circuit voltage-V _{oc} (V)	50.86	51.06	51.26	51.46	51.66	51.86
Short-circuit current-I _{sc} (A)	15.73	15.80	15.87	15.93	16.00	16.07

*1000W·m⁻² on the front side and 135 W·m⁻² on the back side , 25°C cell temperature, AM 1.5.
Bifaciality coefficient is 80% ± 5%.

Thermal Characteristics

Nominal operating cell temperature-NOCT(°C)	42 ± 2
Temperature coefficient of Pmax-γ (% / °C)	- 0.29
Temperature coefficient of Voc-β (% / °C)	- 0.24
Temperature coefficient of Isc-α (% / °C)	0.042

Packaging Specifications

Number of modules per pallet	36
Number of pallets per 40' container	20
Packaging box dimensions (L / W / H)	2300 mm / 1110 mm / 1245 mm
Box weight	1207 kg

Operating Conditions

Max. system voltage	1500 V _{DC}
Max. series fuse rating*	30 A
Operating temperature range	- 40°C~ 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter / velocity)	25 mm / 23 m·s ⁻¹

*Do not connect fuse in combiner box with two or more strings in parallel connection.

General Characteristics

Dimensions (L / W / H)	2278 mm / 1134 mm / 30 mm
Weight	32.0 kg

Construction Materials

Cell (material / quantity)	n-type monocrystalline silicon / 6 × 24
Glass (thickness)	2.0 mm / 2.0 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 300 mm or customized length / 4 mm ²

• Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice.

• The specifications may deviate slightly and are not guaranteed.

• The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.



Yingli Solar Website